
Straight grab bar



- For WCs, showers or baths.
- For use as a handrail, bar grab or support rail.
- NylonClean anti-bacterial treatment: optimal protection against bacterial development.
- Suitable for intensive use in public places or the healthcare sector.
- High-strength polyamide (Nylon): with 2mm reinforced steel core treated against corrosion.
- Uniform non-porous surface for easy maintenance and hygiene.
- Good resistance to chemical products and cleaning.
- Anti-UV treatment.
- Warm to the touch.
- 38mm gap between the bar and the wall: minimal space prevents the forearm passing between the bar and the wall, reducing the risk of fracture in case of loss of balance.
- Concealed fixings, secured to wall by a 6-hole plate, Ø 73mm.
- Supplied with stainless steel screws for concrete walls.
- Dimensions: 300 - 900mm centre-to-centre, Ø 32mm.
- Tested to over 200kg. Maximum recommended user weight: 135kg.
- 30-year warranty.
- CE marked.

Straight grab bar Ø 32mm	
Bright white HR Nylon - 300mm	**5050N**
Bright white HR Nylon - 400mm	**50504N**
Bright white HR Nylon - 500mm	**50505N**
Bright white HR Nylon - 600mm	**50506N**
Bright white HR Nylon - 900mm	**50509N**

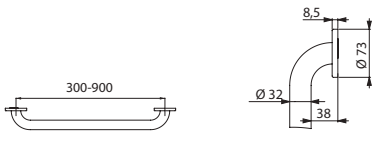

5050N/50504N/50505N/50506N/50509N