
- **Exceptional water savings**: 90%
- **Hygiene**: no manual contact and anti-bacterial duty flush
- **Vandal-resistant**: cross wall installation, concealed fixings
- **Maintenance**: LED diagnostic aids

TEMPOMATIC

Wall-mounted electronic basin tap



- **Independent IP44 electronic control unit.**
- **230/12V mains supply with transformer.**
- **Flow rate pre-set at 3 lpm** at 3 bar, can be adjusted from 1.4 to 6 lpm.
- **Scale-resistant flow straightener.**
- **Adjustable duty flush** (~60 seconds every 24 hours after last use).
- Chrome-plated fixed spout L. 170mm with anti-rotating pin and back-nut.
- Escutcheon flush to the wall.
- Shock-resistant infrared presence detection sensor.
- Anti-blocking security.
- For walls ≤ 165mm or panels ≤ 30mm.
- M⅜" solenoid valve with integrated filter.
- Threaded rods can be cut to size.
- Suitable for people with reduced mobility.
- 30-year warranty.

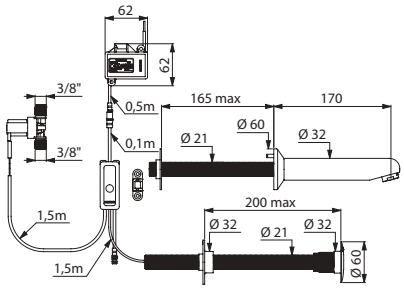

441200

Product currently under development.

TEMPOMATIC cross wall tap	
For panels ≤ 30mm	**441100**
For walls ≤ 165mm	**441200**
FM⅜" connection Ø 15mm for compression fittings	**813815**

We recommend installing a TMV *(see page 143)*
Alternative spout and cross wall lengths available on request



- **Exceptional water savings**: 90%
- **Vandal-resistant**: chrome-plated solid brass, cross wall installation, concealed fixings
- **Maintenance**: LED diagnostic aids
- **Hygiene**: no manual contact and anti-bacterial duty flush




TEMPOMATIC

Cross wall electronic basin tap

NEW



- **Independent IP44 electronic control unit.**
- **230/12V mains supply with transformer.**
- **Flow rate pre-set at 3 lpm** at 3 bar, can be adjusted from 1.4 to 6 lpm.
- **Scale-resistant flow straightener.**
- **Adjustable duty flush** (~60 seconds every 24 hours after last use).
- Chrome-plated fixed spout L.170mm with anti-rotating pin & back-nut.
- Escutcheon flush to the wall.
- Shock-resistant infrared presence detector.
- Anti-blocking security.
- Cross wall for walls ≤ 165mm or panels ≤ 30mm.
- M⅜" solenoid valve with integrated filter.
- Threaded rods can be cut to size.
- Suitable for people with reduced mobility.
- 30-year warranty.

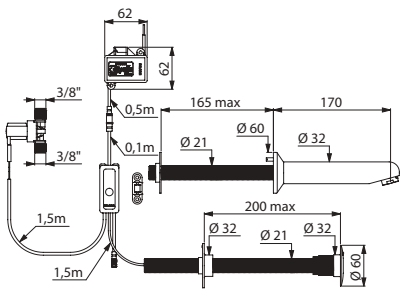

441200

Product currently under development.

TEMPOMATIC cross wall basin tap	
For panels ≤ 30mm	**441100**
For walls ≤ 165mm	**441200**
FM⅜" connection Ø 15mm for compression fittings	**813815**

We recommend a TMV *(see page 143)*
Alternative spout and cross wall lengths available on request