
Soap dish
Wall-mounted



- Concealed fixings.
- Support fixed to wall by 4 screws.
- Chrome-plated Bayblend®.
- Matte or bright finish.
- 30-year warranty.




710500

Wall-mounted soap dish	
Matte finish	**710500**
Bright finish	**710501**

Soap dispenser
Designed for showers



- Waterproof, tamperproof model.
- No-waste, non-drip pump dispenser.
- Anodised aluminium cover.
- Ergonomic anti-blocking push-button.
- Capacity: 1 litre.
- 30-year warranty.

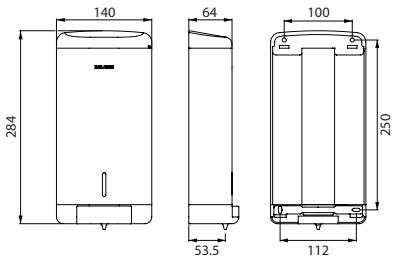


510579

Wall-mounted	510579

Wall-mounted elbow outlet
For flexible shower hoses



- Wall-mounted elbow outlet for flexible shower hoses.
- Chrome-plated solid brass.
- MM½".
- 30-year warranty.




868121

Wall-mounted elbow outlet	868121

Push-fit rapid STOP connector
For shower panels



- Push-fit rapid STOP connector.
- Connects flexible hose to shower panel.
- 30-year warranty.




807792

STOP connector	807792


PREMIX NANO
Thermostatic mixing valve



- Thermostatic mixing valve for MW distribution.
- Temperature can be adjusted from 34 - 60°C.
- To be placed upstream of the shower.
- Anti-scalding failsafe.
- Filters and non-return valves.
- Thermal shocks are possible.
- Supplies one shower.
- 30-year warranty.



732012



732125


PREMIX NANO	
Nickel, FFM⅜"	**732012**
Polished, FFM⅜"	**732016**
Nickel, M½" Ø 15mm	**732125**
Nickel, F½" Ø 15mm	**732115MEC**
Polished, M½" Ø 15mm	**732126**

For NHS compliant versions, *see page 155*

PREMIX COMPACT
Thermostatic mixing valve



- Thermostatic mixing valve for MW distribution.
- Temperature can be adjusted from 30 - 60°C.
- To be placed upstream of the shower.
- Anti-scalding safety.
- Filters and non-return valves.
- Thermal shocks are possible.
- 30-year warranty.



733015

PREMIX COMPACT	
M½"	**733015**
M¾"	**733020**
M½" Ø 15mm	**733125**
M¾" Ø 15mm	**733126**

For NHS compliant versions, *see page 155*