- **Exceptional water savings**: 90%
- **Hygiene**: no manual contact, reduced-stagnation solenoid valve, anti-bacterial duty flush
- **Easy to install**: modular and adjustable waterproof housing (for walls and panels)
- **Vandal-resistant**: recessed installation, concealed fixings

BINOPTIC 2

Recessed electronic basin tap

NEW




- **Battery-operated with CR123 6V Lithium batteries** or **230/6V mains supply** (cable and transformer supplied).
- **Stainless steel wall plate 145 × 145mm with integrated electronics.**
- **Recessed waterproof housing:**
  - Collar with waterproof seal.
  - Hydraulic connection from the outside and maintenance from the front.
  - Modular installation (rails, solid walls, panels).
  - Compatible with wall finishes from 10 to 120mm (while maintaining the minimum recessing depth of 83mm).
  - Suitable for standard or pipe-in-pipe supply.
  - Stopcock and flow rate adjustment, filter and solenoid valve are all integrated and accessible from the front.
  - BINOPTIC 2 F½" valve.
  - Supplied in 2 kits: secure system flush without sensitive elements.
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- **Hygienic duty flush** every 24 hours (can be adjusted to 12 hours or OFF) after last use.
- **Flow rate pre-set at 3 lpm** at 3 bar, can be adjusted.
- **Scale-resistant flow straightener.**
- **Spout with smooth interior** and low water volume (reduces bacterial development).
- Suitable for people with reduced mobility.
- 30-year warranty.

Product currently under development.

BINOPTIC 2 tap recessed in waterproof housing	
Satin finish - mains supply 230V Spout L. 190mm	**370SBOX** **+ 370100**
Chrome-plated finish - mains supply 230V Spout L. 190mm	**370SBOX** **+ 370110**
Satin finish - 6V batteries Spout L. 190mm	**370PBOX** **+ 370106**
Chrome-plated finish - 6V batteries Spout L. 190mm	**370PBOX** **+ 370116**

We recommend installing a TMV *(see page 143)*

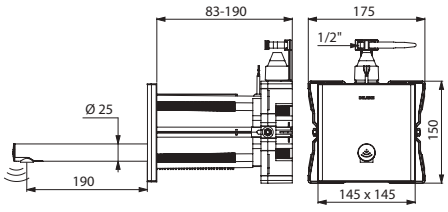

370SBOX + 370110