

TEMPOMATIC 5

Electronic mixer and tap, battery or mains operated

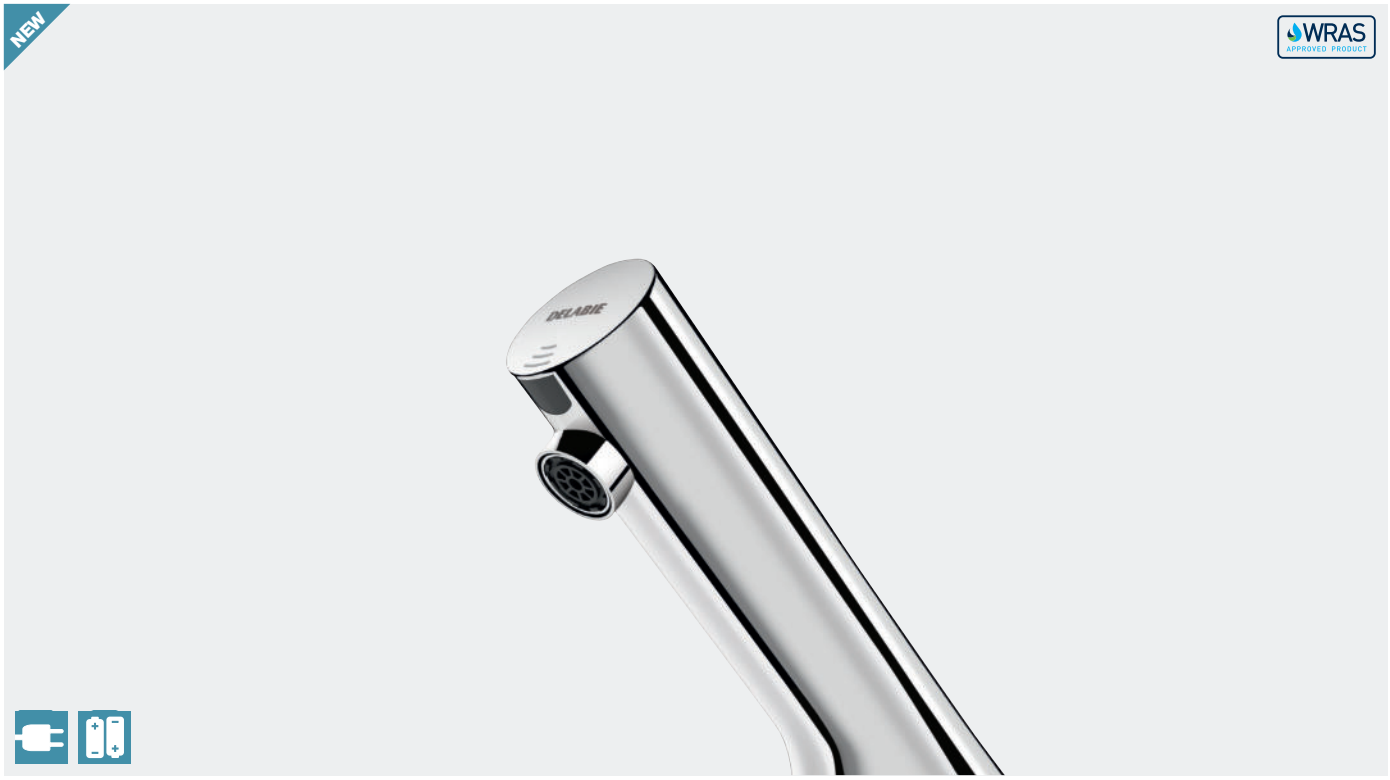


- **230/6V mains supply** or **integrated CR123 6V Lithium batteries.**
- **Reduced-stagnation solenoid valve and electronic unit integrated** into the body of the mixer/tap.
- **Flow rate pre-set at 3 lpm** at 3 bar, can be adjusted from 1.4 - 6 lpm.
- **Scale-resistant flow straightener.**
- **Duty flush** (~60 seconds every 24 hours after last use).
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- Chrome-plated metal body.
- PEX flexibles with filters and non-return valves.
- Fixing reinforced by 2 stainless steel rods.
- Anti-blocking security.
- Side temperature control with adjustable maximum temperature limiter on mixers.
- 30-year warranty.




Standard lever

	F⅜" with stopcock	F⅜" without stopcock	Ø15mm for comp. fittings (UK/Ireland)
TEMPOMATIC MIX 5 mixer			
Mains supply - recessed unit	**499000**	**499100**	**49900015**
Mains supply - plug-in	**499001**	**499101**	**-**
Battery-operated	**499006**	**499106**	**49900615**
TEMPOMATIC 5 tap			
Mains supply - recessed unit	**449000**	**449100**	**44900015**
Mains supply - plug-in	**449001**	**449101**	**-**
Battery-operated	**449006**	**449106**	**44900615**

We recommend installing a TMV for taps *(see page 84)*

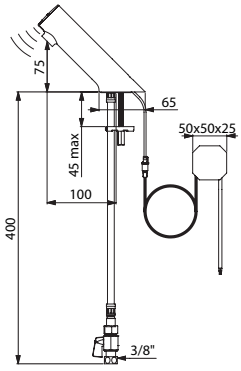

449000

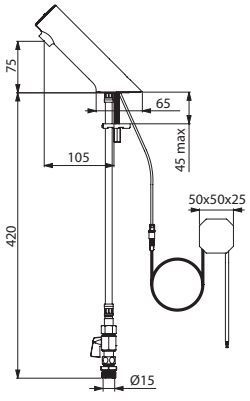

44900015