
Auto-rewind hose reel



- Flexible hose L. 15m and guide rollers.
- Maximum temperature: 50°C.
- Flow rate 23 lpm at 3 bar.
- Maximum pressure 20 bar, 12 bar with trigger-operated hand spray.
- Model 5675T2: 304 stainless steel bracket and drum Ø 390mm.
- Model 5676T2: 304 stainless steel bracket and ABS drum Ø 425m.
- Order separately: an angled stopcock with integrated vacuum breaker to prevent the back flow of polluted water into the mains supply *(see opposite).*
- 30-year warranty.

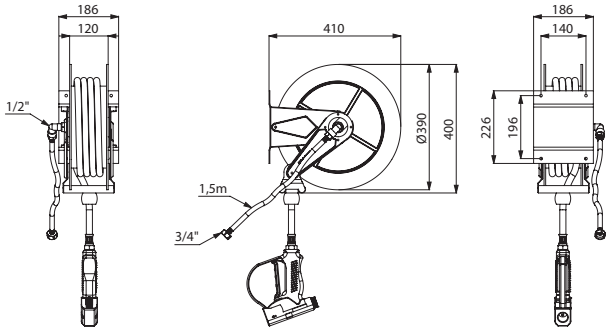

5675T2


Auto-rewind hose reel	
Stainless steel	**5675T2**
ABS	**5676T2**
Options: rotating base and stopcock *(see opposite)*	

Related products



Rotating base

- 304 stainless steel.
- Rotates 40° to the left or right.
- Can be locked in the 0° position by tightening the screws.
- 30-year warranty.




5679

Rotating base	5679




Flexible hose for reel

- Flexible hose L. 15m.
- Maximum temperature: 50°C.
- Maximum pressure: 20 bar.
- 30-year warranty.




435576

Flexible hose L. 15m for auto-rewind hose reel	435576



Stopcock M½"

- ¼-turn ceramic valve head.
- Integrated backflow prevention device and non-return valve (anti-pollution protection).
- Chrome-plated brass body.
- 30-year warranty.



158100

Stopcock M½"	158100

SPECIALIST PRODUCTS