BINOPTIC

Electronic mixer and tap, mains supply or battery-operated



- **Independent IP65 electronic control unit.**
- **230/12V mains supply with transformer** or **CR123 6V Lithium batteries.**
- **Scale-resistant flow straightener.**
- **Spout with smooth interior and low water volume** (reduces bacterial development).
- **Adjustable duty flush** (pre-set flush ~60 seconds every 24 hours after last use).
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- Chrome-plated brass body.
- PEX flexibles with filters and solenoid valves.
- Fixing reinforced by 2 stainless steel rods.
- Anti-blocking security.
- Side temperature control with adjustable maximum temperature limiter and long lever on mixers.
- Suitable for people with reduced mobility.
- 30-year warranty.




Long lever


Two drop heights available depending on the choice of sink:
H. 170mm for semi-recessed sinks.
H. 250mm for countertop sinks.

	M¾"	Ø15mm for comp. fittings (UK/Ireland)
BINOPTIC MIX mixer		
Mains supply		
H. 170mm	**388MCHLH**	**388MCHLH15**
H. 250mm	**398MCHLH**	**398MCHLH15**
Battery-operated		
H. 170mm	**488MCHLH**	**488MCHLH15**
H. 250mm	**498MCHLH**	**498MCHLH15**
BINOPTIC tap		
Mains supply		
H. 170mm	**388015**	**38801515**
H. 250mm	**398015**	**39801515**
Battery-operated		
H. 170mm	**488015**	**48801515**
H. 250mm	**498015**	**49801515**

We recommend installing a TMV for taps *(see page 103)*

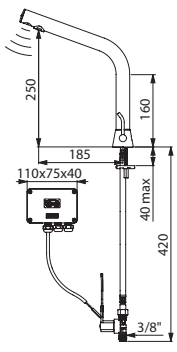

398MCHLH

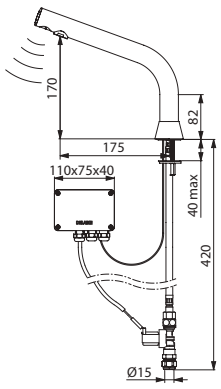

38801515