TEMPOMATIC 4

Electronic mixer and tap, battery or mains operated



- **230/6V mains supply** or **integrated CR123 6V Lithium batteries.**
- **Reduced-stagnation solenoid valve and electronic unit integrated** into the body of the mixer/tap.
- **Flow rate pre-set at 3 lpm** at 3 bar, can be adjusted from 1.4 - 6 lpm.
- **Scale-resistant flow straightener.**
- **Duty flush** (~60 seconds every 24 hours after last use).
- Active, infrared presence detection, sensor at the end of the spout optimises detection.
- Chrome-plated stainless steel body.
- Cap fixed in place by 2 concealed screws.
- PEX flexibles with filters and non-return valves.
- Fixing reinforced by 2 stainless steel rods.
- Anti-blocking security.
- Side temperature control with adjustable maximum temperature limiter on mixers.
- 30-year warranty.




Standard lever




Long lever

	F⅜" with stopcock	F⅜" without stopcock	F⅜" DZR-LEAD FREE	Ø15mm for comp. fittings (UK/Ireland)
TEMPOMATIC MIX 4 mixer				
Recessed mains supply	**490000**	**490100**	**490100AS**	**49000015**
Plug-in mains supply	**490001**	**490101**	**-**	**49000115**
Battery-operated	**490006**	**490106**	**490106AS**	**49000615**
TEMPOMATIC 4 tap				
Recessed mains supply	**440000**	**440100**	**440100AS**	**44000015**
Plug-in mains supply	**-**	**440101**	**-**	**-**
Battery-operated	**440006**	**440106**	**440106AS**	**44000615**

We recommend installing a TMV for taps *(see page 84)*
Option: for long lever, please add "LH" after the reference

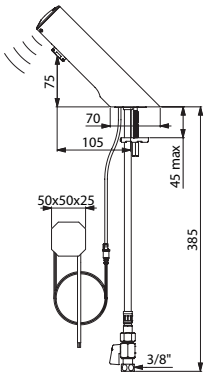

440000

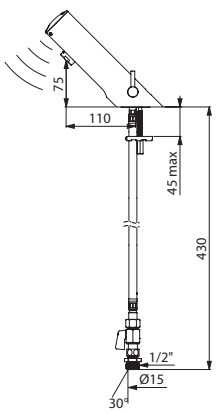

49000615