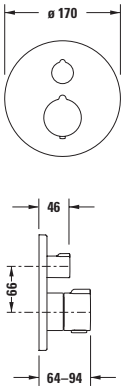

White Tulip Design by Philippe Starck

		Description	H (mm)	Model-No.	Euro
		**Thermostatic bath mixer for concealed installation**			
		connection type: basic set for concealed installation, thermostatic cartridge, safety lock at 38°C, round escutcheon Ø 170 mm, flow rate 20,6 l/min (3 bar), diverter bath spout / hand shower, includes: visible parts with functional unit, recommended operating pressure 3 - 5 bar, with shut-off and diverter valve			
		surface chrome		**C15200 0140 10**	650
		with shut-off and diverter valve and security combination			
		surface chrome		**C15200 0180 10**	826
		Necessary accessories			
		Bluebox® 1/2“, Basic set for concealed installation, without shut-off valves		**GK0900 0000 00**	111
		Bluebox® 3/4“, Basic set for concealed installation, with shut-off valves		**GK0900 0010 00**	232
		**Bath spout**			
		projection 205 mm, connection size DN15, flow rate 19,0 l/min (3 bar), noise class I, round escutcheon			
		surface chrome		**C15240 0100 10**	263