

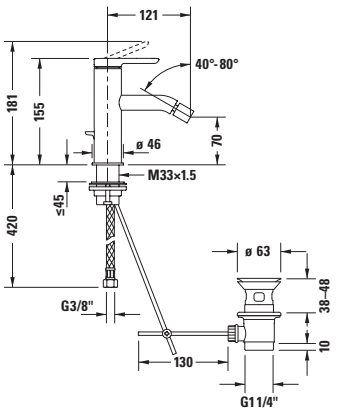
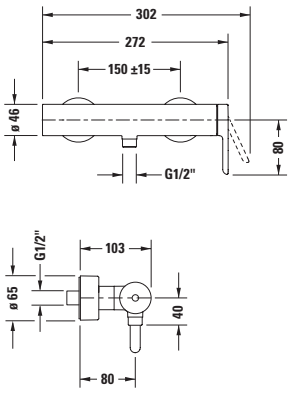
C.1 Design by Kurt Merki Jr.

	Description	H (mm)	Model-No.	Euro
  	**Single lever basin mixer for concealed installation**			
	normal spray, ceramic cartridge, aerator adjustable, flow rate 5,2 l/min (3 bar), connection type: basic set for concealed installation, includes: visible parts, recommended operating pressure 3 - 5 bar, UWL class 1, noise class I, Projection 174 mm			
	surface chrome		**C11070 0030 10**	339
	surface black matt		**C11070 0030 46**	449
	Projection 225 mm			
	surface chrome		**C11070 0040 10**	371
	surface black matt		**C11070 0040 46**	491
	Necessary accessories			
	Basic set single lever basin mixer for concealed installation, noise class I, connection size DN15		**GK1900 0020 00**	256
 	**Single lever bidet mixer**			
	ceramic cartridge, projection 121 mm, flexible connection hoses 3/8“, flow rate 5,0 l/min (3 bar), normal spray, spout fixed with ball joint, connection size DN15, recommended operating pressure 3 - 5 bar, noise class I, with pop-up waste set			
	surface chrome	155	**C12400 0010 10**	298
	surface black matt	155	**C12400 0010 46**	399
 	**Single lever shower mixer for exposed installation**			
	connection type: s-union, centre distance 150 mm ± 15 mm, ceramic cartridge, non-return valve in the hose connection, flow rate 12,6 l/min (3 bar), hose connection DN15, connection size DN15, recommended operating pressure 3 - 5 bar, noise class I			
	surface chrome		**C14230 0000 10**	358