TEMPOMATIC 2

Electronic mixer and tap, mains supply or battery-operated



- **Independent IP65 electronic control unit.**
- **230/12V mains supply with transformer** or **CR123 6V Lithium battery.**
- **Scale-resistant flow straightener.**
- **Adjustable duty flush**
  (pre-set flush ~60 seconds every 24 hours after last use).
- Flow rate pre-set at 4 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
- Shock-resistant infrared presence detection sensor.
- Chrome-plated solid brass body.
- PEX flexibles with filters and solenoid valves.
- Fixing reinforced by 2 stainless steel rods.
- Anti-blocking security.
- Suitable for people with reduced mobility.
- 30-year warranty.


On mixers:
- Side temperature control with adjustable maximum temperature limiter.
- Solenoid valves are upstream of the mixing chamber.




Standard lever

	M¾"
TEMPOMATIC MIX 2 mixer	
Mains supply	**494000**
Battery-operated	**494006**
TEMPOMATIC 2 tap	
Mains supply	**444000**

We recommend installing a TMV for taps *(see page 103)*



494000

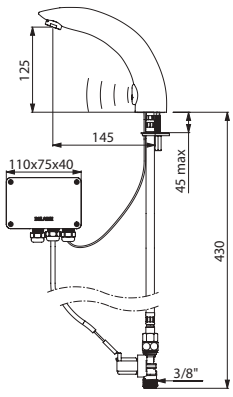

444000