

Angled grab bar 135°



- **For WCs, showers or baths.**
- **For use as a handrail (horizontal part) or as a grab bar (135° part).**
- **NylonClean anti-bacterial treatment:** optimal protection against bacterial development.
- **Universal for either left or right side.**
- Suitable for intensive use in public places or the healthcare sector.
- High-strength polyamide (Nylon): with 2mm reinforced steel core treated against corrosion.
- Uniform non-porous surface for easy maintenance and hygiene.
- Good resistance to chemical products and cleaning.
- Anti-UV treatment.
- Warm to the touch.
- 38mm gap between the bar and the wall: minimal space prevents the forearm passing between the bar and the wall, reducing the risk of fracture in case of loss of balance.
- **3 fixing points prevent the hand from getting trapped and simplify installation.**
- Concealed fixings, secured to wall by a 6-hole plate, Ø 73mm.
- Supplied with stainless steel screws for concrete walls.
- Dimensions: 400 × 400mm or 220 × 220mm, Ø 32mm.
- Tested to over 200kg. Maximum recommended user weight: 135kg.
- 30-year warranty.
- CE marked.

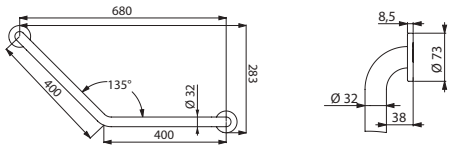

5081N

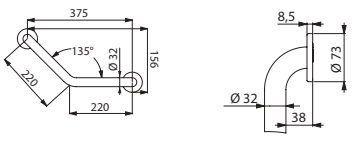

5083N

Angled grab bar 135°, Ø 32mm	
Bright white HR Nylon - 400 × 400mm	**5081N**
Bright white HR Nylon - 220 × 220mm	**5083N**