TEMPOMATIC PRO

Electronic mixer and tap, mains supply or battery-operated



- **Independent IP65 electronic control unit.**
- **230/12V mains supply with transformer** or **CR123 6V Lithium batteries.**
- Scale-resistant flow straightener suitable for fitting a BIOFIL point-of-use filter *(see page 23)*.
- **360° swivelling spout with smooth interior** (reduces bacterial development).
- **Removable spout** for cleaning.
- **Adjustable duty flush** (pre-set flush ~60 seconds every 24 hours after last use).
- Flow rate pre-set at 4 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
- Shock-resistant infrared presence detection sensor.
- Chrome-plated solid brass body with fixing reinforced by 2 stainless steel rods.
- PEX flexibles with filters and solenoid valves M⅜".
- Anti-blocking security.
- Suitable for people with reduced mobility.
- 30-year warranty.



Long lever

On mixers models:


- Side temperature control with ergonomic long lever and adjustable maximum temperature limiter.
- Solenoid valves upstream of the mixing chamber.

Two shut-off options on 230/12V models:


Standard mode: timed flow with automatic shut-off.
ON/OFF mode: user shuts off flow voluntarily or automatic shut-off after 30 minutes of flow.
Thermal shocks are possible.

	M⅜"
TEMPOMATIC PRO mixer H. 300mm L. 200mm	
Mains supply	**495253**
Battery-operated	**495257**
TEMPOMATIC PRO tap H. 300mm L. 200mm	
Mains supply	**445253**
Battery-operated	**445257**

We recommend installing a TMV for taps *(see page 103)*
Option: BIOFIL tap filters *(see page 23)*

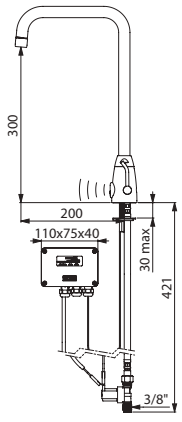

495253

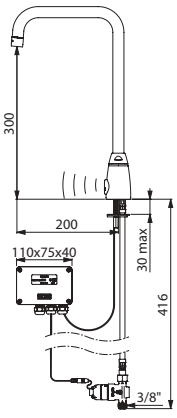

445257